



# ALTERNATORS

DPDT

**BASIC MODEL:**

008-120-12




UL FILE #E101681

## FEATURES:

- Solid State Circuitry
- Surge Protected
- Replaces Mechanical Types
- Plug In Base
- Economical, Easy to Install
- Lead/Lag/Auto Select Switch Option
- Push-To-Test Switch Option

## OPERATION

The 008-120-12 series of alternators were designed for automatic duplex control of motors or other types of loads. When power is applied to the alternator, the DPDT output relay contacts change state each time the control relay voltage is disconnected. Two options are available offering (1) a lead/lag/automatic selector switch and (2) a push-to-test switch for added convenience in testing or trouble shooting.

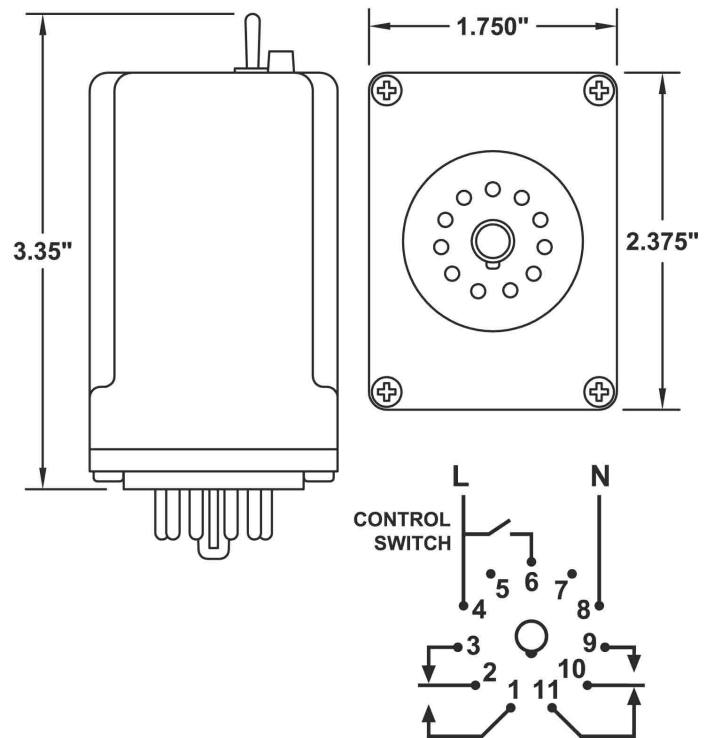

## SPECIFICATIONS

|                    |                           |
|--------------------|---------------------------|
| Supply Voltage:    | 120VAC - 1 Phase 50/60 Hz |
| Output Rating:     | 10A @ Operating Voltage   |
| Relay Type:        | DPDT                      |
| Power Dissipation: | Less Than 1 Watt          |
| Operating Temp:    | -20 To +60 °C             |
| Storage Temp:      | -45 To +85 °C             |
| Enclosure:         | Lexan                     |
| Base:              | Phenolic                  |

## ORDERING INFORMATION

