



TIMERS

DELAY ON OPERATE

MADE IN THE U.S.A.



UL FILE # E101681




FEATURES:

- Solid State Circuitry
- Standard Timing Ranges
- DPDT 10A Relay
- Plug In Base
- Economical


OPERATION

The 021 timer offers a delay on operate function. The timing range is user specified up to one hour. The timer can be manually set to any time within the selected range. Timing is initiated by application of power to the timer between terminals 2 and 7. Upon completion of the timing cycle, the output relay will energize.

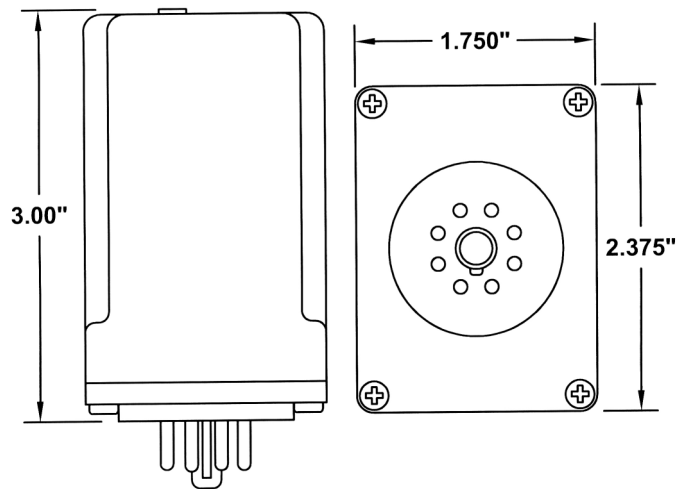

SPECIFICATIONS

Supply Voltage:	120 VAC \pm 10% 1 Phase 50/60 Hz
Relay Type:	DPDT
Output Rating:	10A Resistive @ 240VAC 3.6A Inductive @ 240VAC
Power Dissipation:	Less Than 1 Watt
Operating Temp:	-40°C to +60 °C
Storage Temp:	-45°C to +85 °C
Typical Reset Time:	30 ms
Enclosure:	White Lexan
Base:	Phenolic



ORDERING INFORMATION

Product Type	021 - 120 - XXXX
Operating Voltage	120 = 120VAC
Timing Range	
0010 = 1 to 10 seconds	0200 = 20 to 200 seconds
0020 = 2 to 20 seconds	0300 = 30 to 300 seconds
0030 = 3 to 30 seconds	0600 = 60 to 600 seconds
0060 = 6 to 60 seconds	0900 = 90 to 900 seconds
0090 = 9 to 90 seconds	1200 = 120 to 1200 seconds
0120 = 12 to 120 seconds	1800 = 180 to 1800 seconds
0180 = 18 to 180 seconds	3600 = 360 to 3600 seconds