



# TIMERS

DELAY ON OPERATE

MADE IN  
THE U.S.A.



UL FILE # E101681



## BASIC MODELS:


021-024-XXXX  
021-120-XXXX

## FEATURES:

Solid State Circuitry  
Standard Timing Ranges  
DPDT 10A Relay  
Plug In Base  
Economical, Easy to Install


## OPERATION

The 021 timer offers a delay on operate function. The timing range is user specified up to one hour. The timer can be manually set to any time within the selected range. Timing is initiated by application of power to the timer. Upon completion of the timing cycle, the output relay will energize.

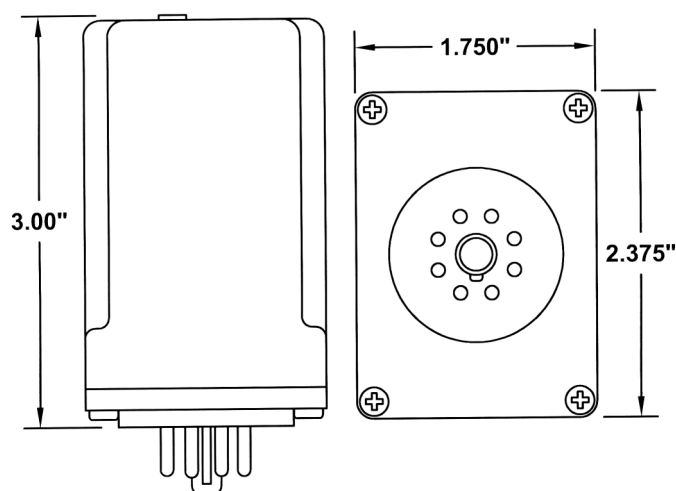

## SPECIFICATIONS

Supply Voltage:	24, 120 VAC $\pm$ 10% 1 Phase 50/60 Hz
Relay Type:	DPDT
Output Rating:	10A Resistive @ 240VAC 3.6A Inductive @ 240VAC
Power Dissipation:	Less Than 1 Watt
Operating Temp:	-40°C to +60 °C
Storage Temp:	-45°C to +85 °C
Typical Reset Time:	30 ms
Enclosure:	White Lexan
Base:	Phenolic



## ORDERING INFORMATION

Product Type 021 - XXX - XXXX  
Operating Voltage \_\_\_\_\_  
024 = 24VAC,  
120 = 120VAC  
Timing Range \_\_\_\_\_

0010 = 1 to 10 seconds	0200 = 20 to 200 seconds
0020 = 2 to 20 seconds	0300 = 30 to 300 seconds
0030 = 3 to 30 seconds	0600 = 60 to 600 seconds
0060 = 6 to 60 seconds	0900 = 90 to 900 seconds
0090 = 9 to 90 seconds	1200 = 120 to 1200 seconds
0120 = 12 to 120 seconds	1800 = 180 to 1800 seconds
0180 = 18 to 180 seconds	3600 = 360 to 3600 seconds