

ALTERNATORS

SPDT

BASIC MODEL:

008-120-10




UL FILE #E101681

FEATURES:

- Solid State Circuitry
- Surge Protected
- Replaces Mechanical Types
- Plug In Base
- Economical, Easy to Install
- Lead/Lag/Auto Select Switch Option
- Push-To-Test Switch Option

OPERATION

The 008-120-10 series of alternators were designed for automatic duplex control of motors or other types of loads. When power is applied to the alternator, the output relay contacts change state each time the control voltage is disconnected. Two options are available offering (1) a lead/lag/automatic selector switch and (2) a push-to-test switch for added convenience in testing or trouble shooting.

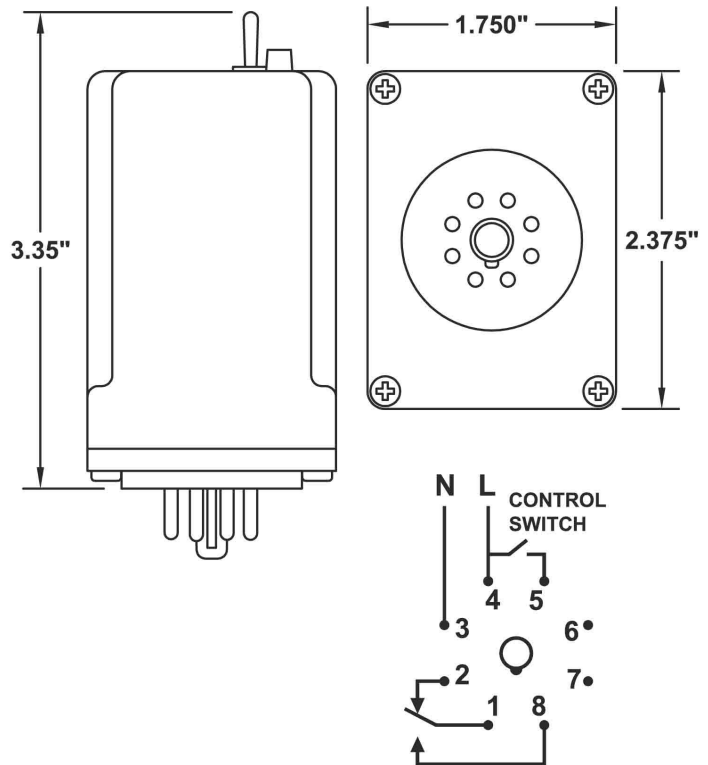

SPECIFICATIONS

Supply Voltage:	120VAC - 1 Phase 50/60 Hz
Output Rating:	10A @ Operating Voltage
Relay Type:	SPDT
Power Dissipation:	Less Than 1 Watt
Operating Temp:	-20 To +60 °C
Storage Temp:	-45 To +85 °C
Enclosure:	Lexan
Base:	Phenolic

ORDERING INFORMATION

