

STATION CONTROLLER SC2000

**MADE IN
THE U.S.A.**



UL FILE # E101681



TYPICAL APPLICATIONS

Simplex, Duplex, Triplex or Quadraplex Pump Control
 Single Speed or Variable Speed Control
 Pump Down (Empty a Tank) or Pump Up (Fill a Tank) Control

DESCRIPTION

The SC2000 is a SCADA ready pump controller designed to perform level control in a wide range of lift station applications. The SC2000 operates the pumps based on the selected setup values and the wet well level signal. The level input source is menu selectable for either a 4-20 mA pressure transducer, or a conductance probe. The SC2000 alternates the pumps, performs lag pump delays, and provides high and low level alarms. The SC2000 has a variety of control options available in the setup menu that may be used to customize the controller for a specific application.


The SC2000 comes standard with 18 Discrete Inputs, 10 Level Probe Inputs, 6 Relay Outputs, an Analog Input for the level input, an Analog Output for output of Wet Well Level, an RS232 Serial Port with the Modbus RTU protocol and an Ethernet Port with the Modbus TCP.

The SC2000 can be ordered with the following options:

- Up to 4 Isolated Analog Outputs for VFD speed control.
- Up to 4 Isolated Analog Inputs for collecting analog data.
- Isolation of the Analog Level Input.

ORDERING INFORMATION

Part Number: SC2000 - X X E X

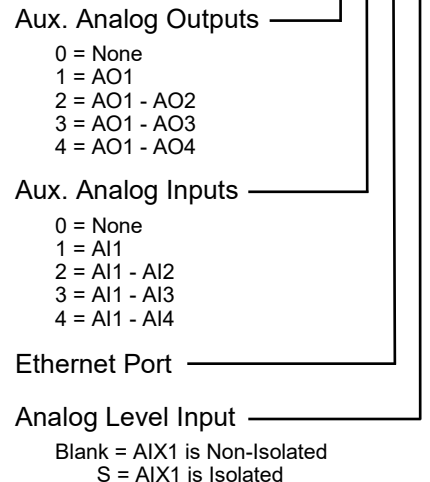

SC2000 STANDARD FEATURES:

- ◆ All Setup Parameter Values May be Viewed or Changed From the Front of Unit
- ◆ 120 VAC input power
- ◆ Level Input Source - Menu Selectable
 - Analog Level Input (AIX1) (4-20 mA from Pressure Transducer)
 - Level Probe (E1 - E10) (Conductance Probe with 10 Electrodes)
- ◆ 20 VDC Power for Analog Level Input Loop
- ◆ 8 Amp Relay Outputs (ROX1 - ROX6) for: Pump Call, High Level, and Low Level Alarms
- ◆ 1 Analog Output (AOX1) provides copy of Wet Well Level.
- ◆ RS-232 Serial Port (COM1) with Modbus RTU Protocol
- ◆ Ethernet Port (ENET1) with Modbus TCP Protocol
- ◆ Alternation Modes - Menu Selectable
 - Standard Alternation
 - Pump 1 Always Lead - Stays On with Other Pumps
 - Pump 1 Always Lead - Turns Off with Other Pumps On
 - Split Alternation - Pumps 1 & 2, and Pumps 3 & 4
 - Fixed Sequence - Pump 1 Always Leads
- ◆ Alternation - First On - First Off
- ◆ Alternator Logic Skips Disabled Pumps
- ◆ Timed [1 minute] Level Simulation
- ◆ Security Code Protected Parameter Setup
- ◆ 18 Discrete Inputs (D1 - D18) that can be Programmed for the Following Functions:
 - Pump Disable with HOA in OFF, or Pump Fault
 - External Lead Pump Selector Switch
 - All Pump Disable - for Connection to Phase Monitor
 - Limit Number of Pumps Called While on Emergency Power
 - Alternation by External Time Clock
 - Float Switch Backup
- ◆ Status of Discrete Inputs May Be Viewed From Front of Controller
- ◆ Flush Cycle Feature to Reduce Sludge Build-up within the Wet Well
- ◆ Flow Calculator Feature for Latest Inflow Rate, Average Daily Flow, Pump Outflow Rate
- ◆ Unused Output Relays Programmable via SCADA for Additional Control Uses
- ◆ Plug-In Style Connectors
- ◆ Full manual available in pdf format at our website: www.mpelectronics.com

SC2000 OPTIONAL FEATURES:

- ◆ Up to 4 Isolated Analog Outputs for VFD speed control.
- ◆ Up to 4 Isolated Analog Inputs for collecting analog data.
- ◆ Isolation of the Analog Level Input from Power Supply ground.

SPECIFICATIONS

Input Power:	120VAC \pm 10%, 13VA max	Power for Discrete Inputs:	24VDC Unregulated Transient Protected
Agency Approvals:	UL 508, CAN/CSA	Power for Analog Input:	20VDC \pm 1V Regulated Transient Protected
Ambient Operating Temp:		Analog Outputs:	Isolated 4-20mA Maximum Load 900 Ω Transient Protected
Without Analog Outputs:	-20°C to +65°C	Aux. Analog Inputs:	Isolated 4-20mA 100 Ω Load Transient Protected
With Analog Outputs:	-20°C to +50°C	Power for Level Probe:	\pm 6V Square-Wave, 60 Hz
Level Display:	5 Digit, 7 Segment LED		
Level Display Range:	0 - 2310 ft. Decimal Point Position Menu Selectable		
Indicators:	LED		
Color:	White with Blue Lettering		
Relays:	8A @ 120VAC		
Analog Level Input:	4-20mA, 100 Ω Load Transient Protected		
External Dimensions:	8.5" W x 6.9" H x 4.9" D		
Cut Out Dimensions:	7.5" W x 6.0" H		